


WOLF-LINDE REPLACEMENT

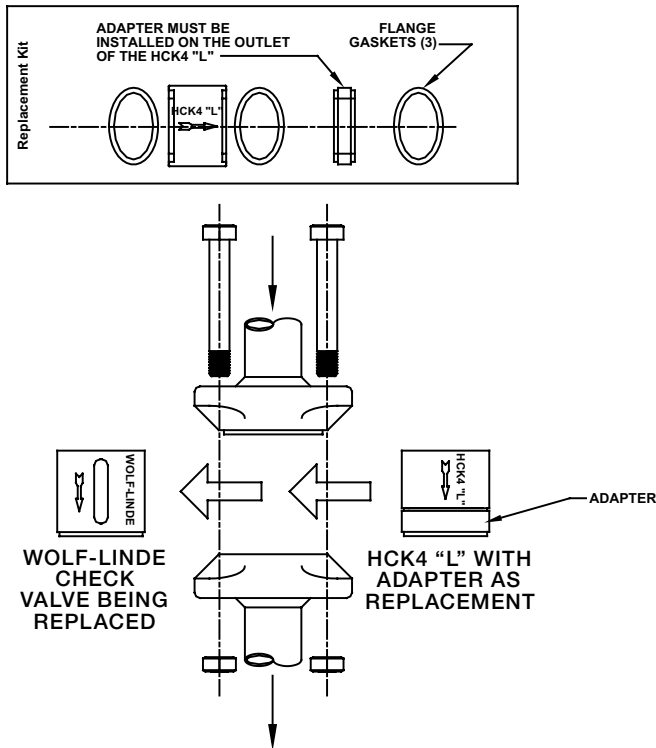

PORT SIZE	WOLF-LINDE VALVE CODE NUMBER	FOR DIRECT REPLACEMENT USE HANSEN REPLACEMENT KIT*
3"	5980	72-1001
4"	5982	72-1002

*Replacement kit is supplied with check valve, adapter, and flange gaskets (3), less flanges and bolts.


CAUTION

Hansen valves are only for refrigeration systems. These instructions must be completely read and understood before selecting, using or servicing Hansen valves. Only knowledgeable, trained refrigeration mechanics should install, operate, or service these valves. Stated temperature and pressure limits should not be exceeded. Bonnets, solenoid tubes, etc. should not be removed from valves unless system has been evacuated to zero pressure. Must also see Safety Precautions in current List Price Bulletin and Safety Precautions Sheet supplied with product.

WARRANTY

All Hansen products, except electronics, are guaranteed against defective materials or workmanship for one year F.O.B. factory. Electronics are guaranteed against defective materials or workmanship for 90 days F.O.B. factory. No consequential damages or field labor is included.

INSTALLATION DIMENSIONS

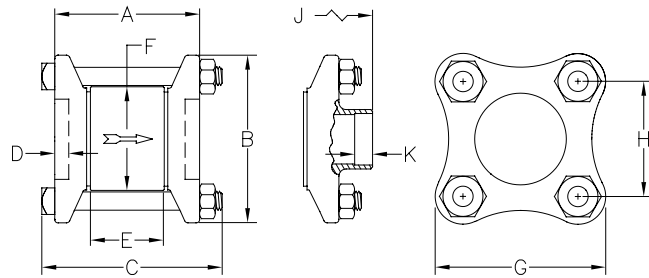

DIMENSION LETTER	HCK4-8 2" PORT	HCK4-0L 3" PORT	HCK4-1L 4" PORT
A	5.06" (129mm)	6.06" (154mm)	6.39" (162mm)
B	4.56" (116mm)	6.00" (152mm)	7.13" (181mm)
C	6.38" (162mm)	7.50" (191mm)	8.00" (203mm)
D	0.75" (19mm)	1.00" (25mm)	1.00" (25mm)
E	2.56" (65mm)	2.92" (74mm)	3.50" (89mm)
F	3.62" (92mm)	4.84" (123mm)	6.06" (154mm)
G	4.56" (116mm)	6.00" (152mm)	7.13" (181mm)
H	3.06" (78mm)	4.12" (105mm)	5.00" (127mm)
J	6.06" (154mm)	7.06" (179mm)	9.89" (251mm)
K	0.87" (22mm)	1.08" (27mm)	1.40" (36mm)
Pipe Size	2"	3"	4"

= "E" dimension is check valve body outside edge to outside edge. Flange groove depth: nominal 0.12" each of two; gasket thickness: nominal 0.06" each of two.

ORDERING INFORMATION

TYPE	PORT SIZE INCHES (mm)	FLANGE CONNECTION STYLE & SIZES		
		FPT, SW, WN		ODS
		STD	ALSO	STD
HCK4-2	5/8" (16)	1/2"	3/8", 3/4"	5/8"
HCK4-3	3/4" (20)	3/4"	1", 1-1/4"	7/8"
HCK4-4	1" (25)	1"	3/4", 1-1/4"	1-1/8"

To Order: Specify valve type, connection style and size, and adapter kit (if needed).

A full line of HCK4 inline check valves (5/8" to 4") and HCK1 piston-type check valves (3/4" to 6") are also available from Hansen.

HANSEN

Hansen Technologies Corporation
 400 Quadrangle Drive, Suite F
 Bolingbrook, Illinois 60440 USA
 Tel: 630.325.1565 Fax: 630.325.1572 Toll: 866.4HANSEN
 Email: sales@hantech.com Web: www.hantech.com
USA · Asia · Europe · India · Latin America · Middle East
 © 2011 Hansen Technologies Corporation