



*HCK4 "L" with Adapter for
Wolf-Linde Replacement*

Specifications, Applications, Service Instructions & Parts

HCK4 "L" GRAVITY DRAIN CHECK VALVES

**Gravity Drain Check Valves
2", 3" and 4"
(50, 80 and 100 mm)**



INTRODUCTION

The HCK4 "L" series of in-line gravity drain check valves are dependable, compact, and rugged. The HCK4 "L" gravity drain check valves feature a low wide-opening pressure differential suitable for liquid transfer systems and other low-pressure-drop applications. In addition, an optional, specially-designed adapter allows direct replacement of existing 3" and 4" Wolf-Linde gravity drain check valves without repiping.

ADVANTAGES

The HCK4 "L" series check valves, typically installed in vertical pipe lines, offer reliable operation. Plated bodies, stainless steel seat discs, and stainless steel springs provide superior corrosion resistance. The lapped metal-to-metal seating facilitates durable closing of these check valves.


KEY FEATURES

- Negligible cracking pressure differential
- Low wide-opening differential of 0.25 psid (.02 bar)
- Requires no piping changes to replace Wolf-Linde gravity drain check valve (3" and 4")
- Low bubble leakage tolerance
- For ammonia, R22, R134a, and other Hansen-approved refrigerants

MATERIAL SPECIFICATIONS

- Body: Ductile iron, ASTM A536 (nodular iron GGG-40), zinc chromate plated
- Seat Disc: Stainless steel
- Seat Cartridge: Steel, ASTM A108, zinc chromate plated
- Spring: Stainless steel
- Adapter: Low carbon steel, zinc chromate plated
- Safe Working Pressure: 400 psig (27 bar)
- Operating Temperature: -60°F to +240°F
(-50°C to +115°C)


TYPICAL APPLICATION

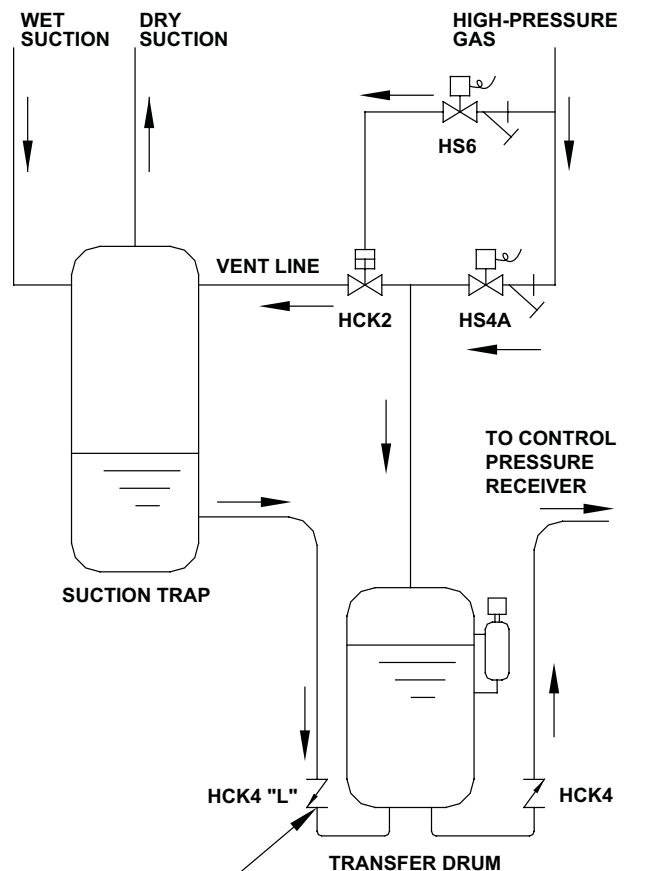

**HCK4 "L" GRAVITY DRAIN CHECK VALVE.
INSTALL AS LOW AND CLOSE TO THE
TRANSFER DRUM AS POSSIBLE, WITH
NO EXTRA BENDS IN THE PIPING
TO THE TRANSFER DRUM.**

Note: The above drawing is for illustration purposes and should not be used for actual engineering or design.

WOLF-LINDE REPLACEMENT

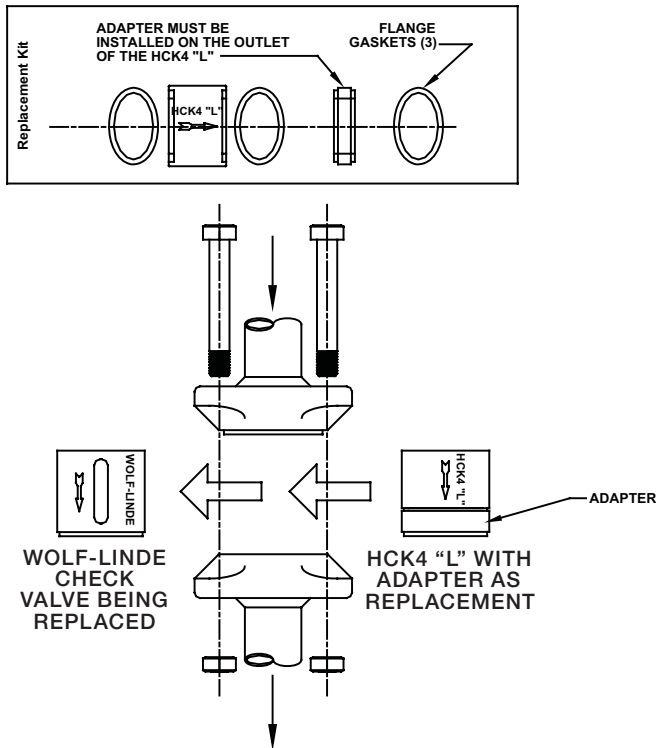

PORT SIZE	WOLF-LINDE VALVE CODE NUMBER	FOR DIRECT REPLACEMENT USE HANSEN REPLACEMENT KIT*
3"	5980	72-1001
4"	5982	72-1002

*Replacement kit is supplied with check valve, adapter, and flange gaskets (3), less flanges and bolts.


CAUTION

Hansen valves are only for refrigeration systems. These instructions must be completely read and understood before selecting, using or servicing Hansen valves. Only knowledgeable, trained refrigeration mechanics should install, operate, or service these valves. Stated temperature and pressure limits should not be exceeded. Bonnets, solenoid tubes, etc. should not be removed from valves unless system has been evacuated to zero pressure. Must also see Safety Precautions in current List Price Bulletin and Safety Precautions Sheet supplied with product.

WARRANTY

All Hansen products, except electronics, are guaranteed against defective materials or workmanship for one year F.O.B. factory. Electronics are guaranteed against defective materials or workmanship for 90 days F.O.B. factory. No consequential damages or field labor is included.

INSTALLATION DIMENSIONS

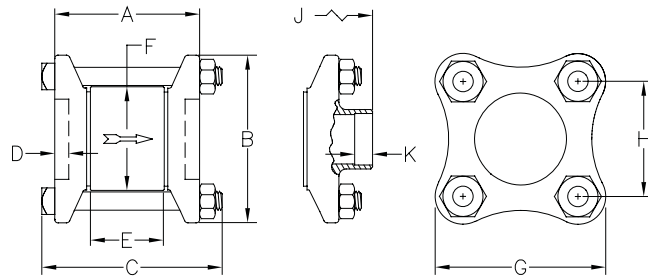

DIMENSION LETTER	HCK4-8 2" PORT	HCK4-0L 3" PORT	HCK4-1L 4" PORT
A	5.06" (129mm)	6.06" (154mm)	6.39" (162mm)
B	4.56" (116mm)	6.00" (152mm)	7.13" (181mm)
C	6.38" (162mm)	7.50" (191mm)	8.00" (203mm)
D	0.75" (19mm)	1.00" (25mm)	1.00" (25mm)
E	2.56" (65mm)	2.92" (74mm)	3.50" (89mm)
F	3.62" (92mm)	4.84" (123mm)	6.06" (154mm)
G	4.56" (116mm)	6.00" (152mm)	7.13" (181mm)
H	3.06" (78mm)	4.12" (105mm)	5.00" (127mm)
J	6.06" (154mm)	7.06" (179mm)	9.89" (251mm)
K	0.87" (22mm)	1.08" (27mm)	1.40" (36mm)
Pipe Size	2"	3"	4"

= "E" dimension is check valve body outside edge to outside edge. Flange groove depth: nominal 0.12" each of two; gasket thickness: nominal 0.06" each of two.

ORDERING INFORMATION

TYPE	PORT SIZE INCHES (mm)	FLANGE CONNECTION STYLE & SIZES		
		FPT, SW, WN		ODS
		STD	ALSO	STD
HCK4-2	5/8" (16)	1/2"	3/8", 3/4"	5/8"
HCK4-3	3/4" (20)	3/4"	1", 1-1/4"	7/8"
HCK4-4	1" (25)	1"	3/4", 1-1/4"	1-1/8"

To Order: Specify valve type, connection style and size, and adapter kit (if needed).

A full line of HCK4 inline check valves (5/8" to 4") and HCK1 piston-type check valves (3/4" to 6") are also available from Hansen.

HANSEN

Hansen Technologies Corporation
 6827 High Grove Boulevard
 Burr Ridge, Illinois 60527 USA
 Tel: 630.325.1565 Fax: 630.325.1572 Toll: 800.426.7368
 Email: info@hantech.com Web: www.hantech.com
USA · Asia · Europe · India · Latin America · Middle East
 © 2006 Hansen Technologies Corporation